

STI Wireless Driveway Monitor



STI-34150



STI-34100

PRODUCT OVERVIEW

The Wireless Driveway Monitor sends a signal to your home or office to alert you when a vehicle enters your driveway. The receiver chimes and the alert light flashes when a vehicle passes by the sensor. The alert light will flash until the reset button is pushed.

Note: When a vehicle enters your driveway and triggers the Driveway Monitor, there is a 10 to 15 second delay for the unit to reset before the next vehicle will be detected.

HOW IT WORKS

The driveway sensor uses a patented magnetometer sensor system. Movement of any large metallic (iron or steel) object having a magnetic field will cause the Motion Alert® sensor to transmit to the receiver. People, animals and shadows will not trigger the driveway sensor.

The sensor may be placed as far as 1000 feet (line of sight) away from the receiver in your home.

FEATURES

- Alerts you when a vehicle is coming up your driveway. Indoor AC-powered receiver chimes and flashes when a vehicle approaches.
- When a vehicle passes near the sensor, the receiver chimes and flashes the alert light. The alert light will flash until reset after a vehicle is detected. The receiver will continue to chime each time a vehicle passes.
- Under ideal conditions, the sensor may be placed as far as 1000 feet (line of sight) away from the receiver in your home.
- When a vehicle activates the receiver, there is a 10 to 15 second delay for the sensor to reset before the next vehicle will be detected.
- Purchase additional Driveway Monitor sensors or receivers to cover multiple areas and to expand your system (up to 4 sensors).
- Can be set to low, medium or high sensitivity level.
- Additional transmitter will produce a different chime from the receiver when triggered.
- Will not be triggered by animals, people or shadows.
- Receiver has a 12 volt transistor output jack for optional accessories. Output is adequate for small 12 volt relay coil.
- Optional Lamp Controller will turn on for the selected amount of time.
- Can temporarily silence the receiver (for example to avoid the 5 a.m. garbage pickup from triggering your sensor).
- Wireless frequency is 433 MHZ.
- One year warranty from the date of original purchase.

STI Wireless Driveway Monitor

Dimensions and Technical Information

MODELS AVAILABLE





- STI-34100 Solar Driveway Monitor
- STI-34150 Battery Driveway Monitor
- Both models includes:
 - Driveway sensor (transmitter)
 - Indoor receiver
 - Receiver antenna
 - Mounting kit for driveway sensor
 - AC adapter for receiver
 - 2 screws for mounting stake

Optional Accessories

- STI-30104 Lamp Controller - will turn on a lamp anytime your Driveway Monitor is triggered
- STI-34101 Additional Solar sensor (includes STI-30106)
- STI-34151 Additional Battery sensor (includes STI-30106)
- STI-34103 Power supply center positive
- STI-34104 Additional 4 channel receiver
- STI-30105 Extended antenna
- STI-30106 Mounting Replacement Kit (includes cap, wall mount, tube and stake)

WARRANTY

One year warranty from the date of original purchase.

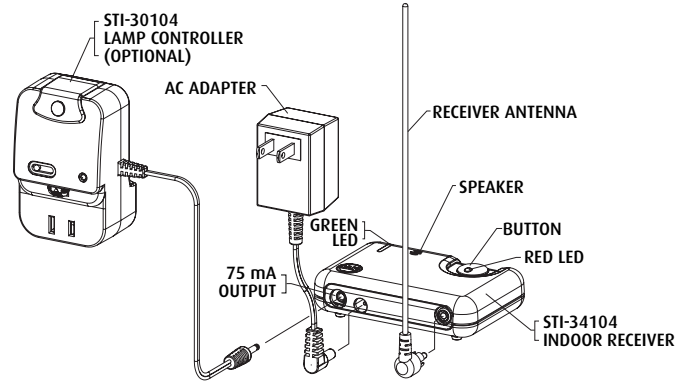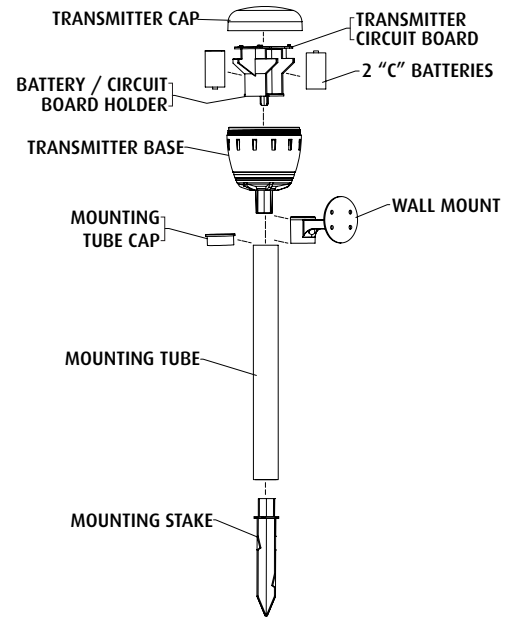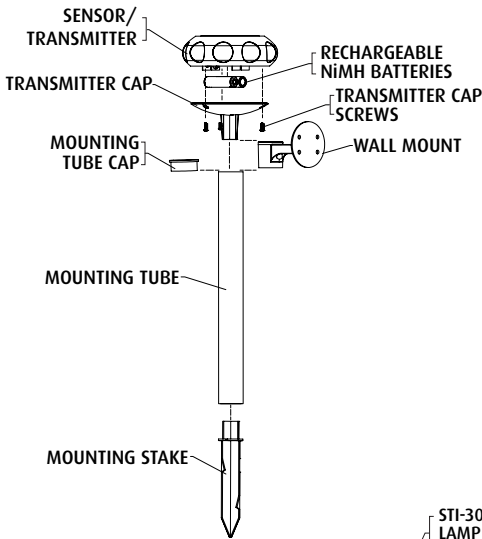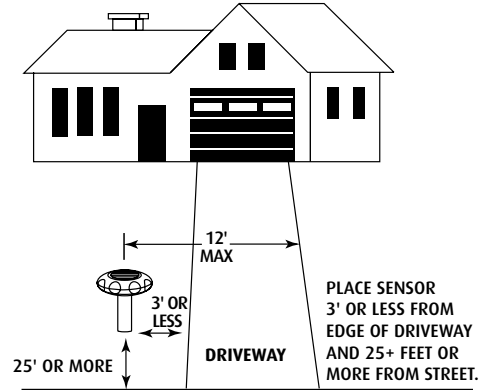

Safety Technology International, Inc.

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
Tollfree: 800-888-4784
info@sti-usa.com
www.sti-usa.com

Unit 49G Pipers Road
Park Farm Industrial Estate
Redditch, Worcestershire
B98 0HU England

Tel: 44 (0) 1527 520 999
Fax: 44 (0) 1527 501 999
Free: 0800 085 1678 (UK)
www.sti-europe.com